



## MX2STS-CF Roll-in Blast Chiller / Freezer

Remote condensing unit version

## Standard Features

- Free standing roll in trolley unit
- Ergonomic touch screen controls integrated into the door
- 5 function home screen
- Manual use Soft Chill, Hard Chill, Soft Freeze, Hard Freeze and Self Adaptive I-Chilling
- 99 program cycles
- · Favourites key shortcuts to the last 9 programs used
- Pre-chilling cycle key to maximise efficiency
- Multi-point core temperature probe
- Timer mode or continuous run
- · Automatic fan stop when opening the door
- Operator selectable de-icing cycle
- External and internal finish made of 304 stainless steel
- Supplied with 20mm insulated stainless steel floor and ramp
- Front frame with anti-condensation system
- Injected polyurethane foam insulation 80mm thick
- Assembly required

Technical data

Load capacity

Waste

Nett weight

Australia

Mulgrave

Australia

Victoria 3170

moffat.com.au

Moffat Pty Limited

740 Springvale Road

Telephone +613-9518 3888

Facsimile +613-9518 3833

vsales@moffat.com.au

External dimensions

Electrical connections

Door configuration

Please refer to Moffat price list for options and accessories

Usable internal dimensions W 900mm x D 825mm x H 1885mm

160ka\*

320ka

Remote condensing unit requirements - Refrigerant type R452A

Remote condensing unit with pump down control

Ambient temperature requirement +15°C - +43°C

Condensing capacity upright Blast Chiller/ Freezer 2.9kW / 9.8kW /

13.5kW for the respective evaporation temperatures of -40/-20/-10°C

\* Note – Load capacities may vary depending on the thermal conductivity

of the food being chilled, the thickness of product and container used

Remote condensing unit version (remote condensing unit not included)

2 x 1/1GN trolley (trolley not included)

W 1100mm x D 1320mm x H 2170mm

Provide for a water runoff & trap to the

selected waste point (B)

Must be stated at time of order

New Zealand

moffat.co.nz

Moffat Limited

45 Illinois Drive

Rolleston 7675 New Zealand


Izone Business Hub

sales@moffat.co.nz

Telephone +64 3-983 6600

Facsimile +64 3-983 6660

3P+N+E, 400-415V, 50/60Hz, 20A, 4.4kW

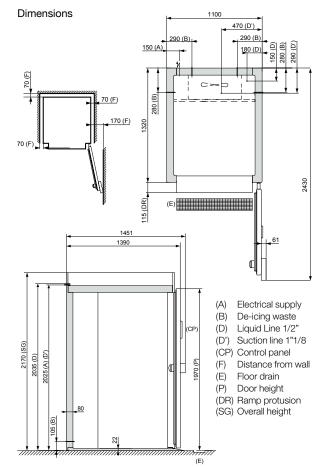

Alternative door opening configurations available



Disclaimer: All unit capacities are based on subjective testing. Moffat accepts no liability for production values. In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.

© Copyright Moffat Ltd AN-FRI-S-1801



an Ali Group Company

