

## HOSHIZAKI

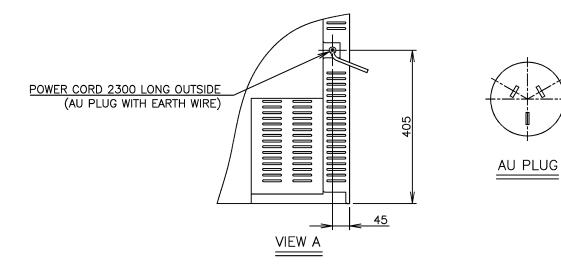

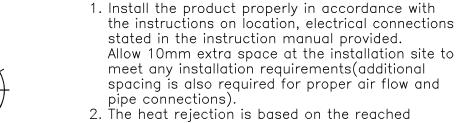



2. The heat rejection is based on the reached pulldown temperature at ambient temperature of 32°C and power supply of 230V 50Hz.

The amperage and electric consumption are based on measurements at ambient temperature of 32°C and power supply of 230V 50Hz.

3. The cabinet temperature range of -25 to  $-7^{\circ}$ C is guaranteed at ambient temperature of 30°C.

4. Product code: T020-C804

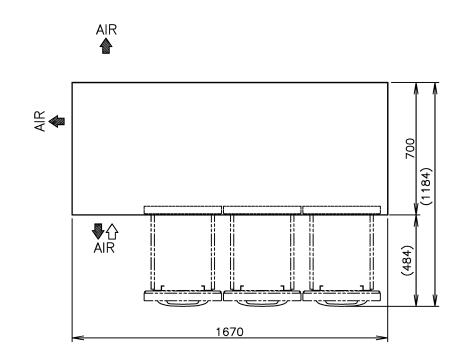

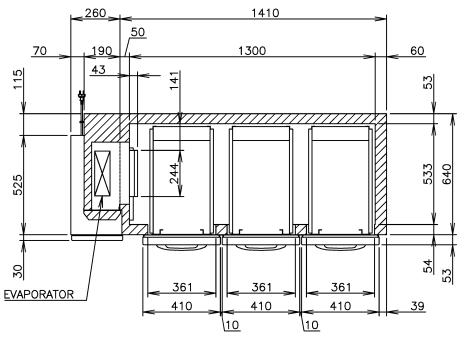

ITEM	Hoshizaki Drawer Type Undercounter Freezer
MODEL	FTC-167DEA-GN-9D
POWER SUPPLY	1 Phase 220-240V 50Hz Capacity: 1.14kVA( 5.2A)
AMPERAGE	Rated: 3.9A
ELECTRIC CONSUMPTION	Motor: *W(Power Factor: *%) Heater: 422W Refrigeration: *W Defrost: 422W
HEAT REJECTION	*W
POWER CORD	2.3m (Plug with Earth Wire)
EFFECTIVE CAPACITY	404L
OUTSIDE DIMENSIONS	1670mm(W) x 700mm(D) x 815mm(H)
INSIDE DIMENSIONS	1300mm(W) x 533mm(D) x 588mm(H)
EXTERIOR	Stainless Steel, Galvanized Steel (Rear/Bottom)
INTERIOR	Stainless Steel, ABS Plastic
INSULATION	Polyurethane Foam
INSULATION FOAM BLOWING AGENT	Cyclopentane
REFRIGERATION SYSTEM	Forced Air Circulation
DEFROST SYSTEM	Glass Tube Heater
COMPRESSOR	Hermetic 495W
CONDENSER	Fin and Tube type, Air—cooled
EVAPORATOR	Fin and Tube Type
REFRIGERANT	R404A/190g
TEMPERATURE CONTROL	Microprocessor (Digital Temp Indication) Adjustable from −25 to −7°C
DEFROST CONTROL	Microprocessor Controlled
ELECTRIC CIRCUIT PROTECTION	Fuse, Earth Wire
REFRIGERANT CIRCUIT PROTECTION	Motor Protector
LEG	Urethane (76mm DIA, 115mm HIGH)
WEIGHT	159kg (Gross Approx. *kg)
PACKAGE	Carton 1735mm(W) x 780mm(D) x 950mm(H)
OPERATING CONDITIONS	Ambient Temperature: 5-43°C  Voltage Range: Rated Voltage±6%

\*We reserve the right to make changes in specifications and design without prior notice.

