


HOSHIZAKI

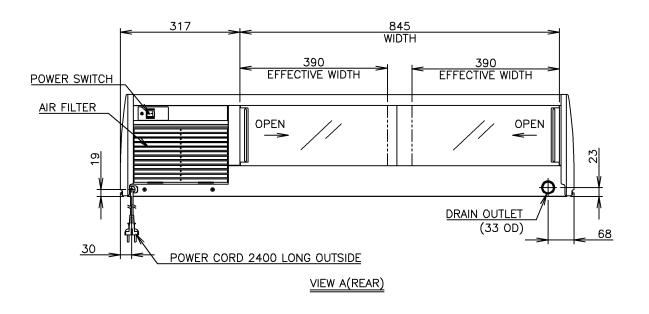

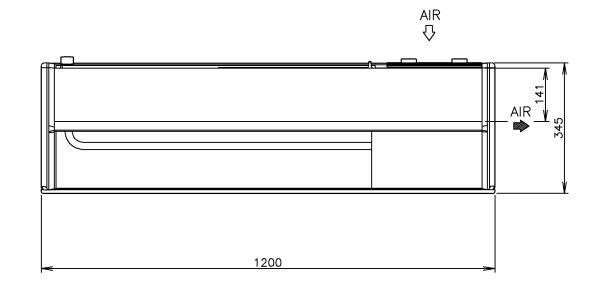






	ITEM	Hoshizaki Counter Showcase					
	MODEL	HNC-120BE-R-B					
∕₅∖	POWER SUPPLY	1 Phase 220-240V 50Hz Capacity: 0.37kVA (1.55A)					
Ճ	AMPERAGE	Rated: 1.2A Starting: 6A					
∕₅∖	ELECTRIC CONSUMPTION	150W (Power Factor: 52%)					
	HEAT REJECTION	350W					
	PULL DOWN TIME (10°C)	Approx. 30min. (Ambient Temp. 30°C, No Load) Measured 20 mm above the food					
	SATURATION TEMPERATURE	Approx. 5°C (Ambient Temp. 30°C, No Load) mount (normal position) located at the interior bottom center					
	POWER CORD	2.4m					
	EFFECTIVE CAPACITY	42L					
	OUTSIDE DIMENSIONS	$1200 \text{mm}(W) \times 345 \text{mm}(D) \times 270 \text{mm}(H)$					
	INSIDE DIMENSIONS	$845mm(W) \times 288mm(D)[Floor] \times 157mm(H)$					
	EXTERIOR	Clear Glass, ABS Plastic, PVC Plastic					
	INTERIOR	Clear Glass, ABS Plastic, Stainless Steel					
	DOOR	Sliding Glass \times 2 [435mm(W) \times 172mm(H)]					
	REFRIGERATION SYSTEM	Convection Cooling					
	DEFROST SYSTEM	N/A					
	COMPRESSOR	Hermetic 140W					
	CONDENSER	Fin and Tube type, Cooling Fan Motor provided					
	EVAPORATOR	(Upper) Tube Type, (Lower) Pipe on Sheet Type					
∕₅∖	REFRIGERANT	R134a/80g					
	ELECTRICAL CIRCUIT PROTECTION	Earth Leakage Circuit Breaker, Earth Wire					
	COMPRESSOR PROTECTION	Motor Protector					
	WEIGHT	Net: 32kg (Gross: 44kg)					
	PACKAGE	Carton (Wooden Pallet) 1280mm(W) × 415mm(D) × 517mm(H)					
	ACCESSORIES	Food Mount x 3, Joint x 1, Drain Hose x 1					
	OPERATING CONDITIONS	Ambient Temperature:: 10 - 30°C Voltage Range: Rated Voltage ±6%					
	*We reserve the right t	make changes in specifications and design without prior notice.					

1. Install the sushi case properly in accordance with

- the instructions on location, water supply/drain connections and electrical connections stated in the instruction manual provided. Allow 10mm extra space at the installation site to meet any installation requirements (additional spacing is also required for proper air flow and pipe connections).
- 2. Relative humidity exceeding 60% may result in excessive condensation on the exterior.
- 3. The food temperature is controllable by turning over the food mounts.
 4. Product Code: S052-C168
- ▲5. Auxiliary Code: C2 and later

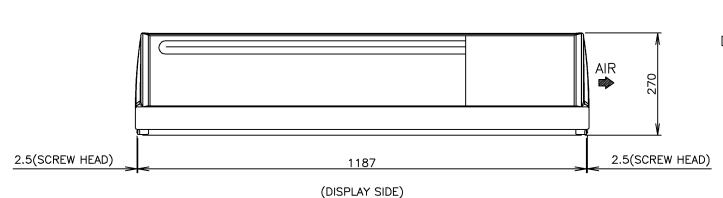

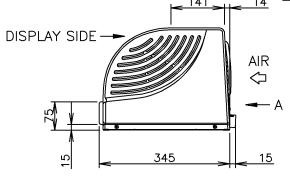



SECTIONAL SIDE VIEW

PPROVED CH ORIHATA S	ECKED AEKI		DRAWN IISHIKOORI	SCALE 1	/10	TRIGON	OMETRY
RIHATA HIROSAWA	ß	2013.03.2	6 DATE	0.04.40	DRAWING N	0. 10	SYMBOL
PROVED DESIGNED	SYMBOL	DATE	7 2010).01.12	I DU6	140	/C\