

HOSHIZAKI




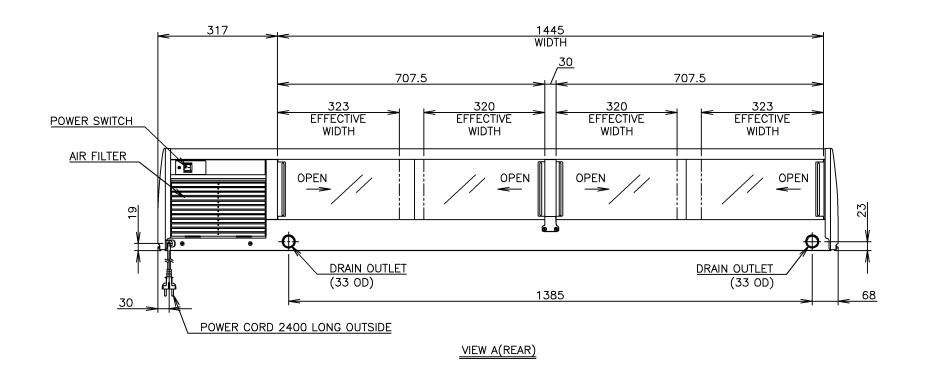

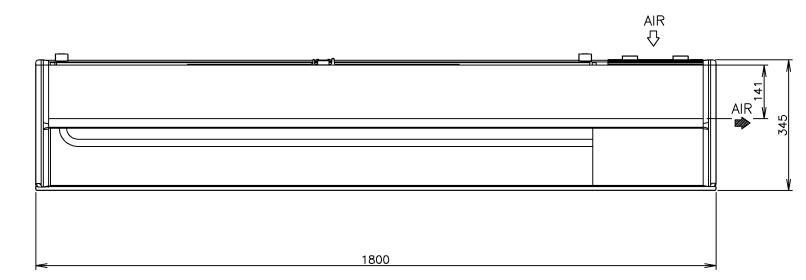

	ITEM	Hoshizaki Counter Showcase							
	MODEL	HNC-180BE-R-B							
<u>/</u> 5\	POWER SUPPLY	1 Phase 220-240V 50Hz Capacity: 0.37kVA (1.55A)							
ß	AMPERAGE	Rated: 1.2A Starting: 6A							
<u>/</u> 5\	ELECTRIC CONSUMPTION	150W (Power Factor: 52%)							
	HEAT REJECTION	370W							
	PULL DOWN TIME (10°C)	Approx. 30min. (Ambient Temp. 30°C, No Load) Measured 20 mm above the food							
	SATURATION TEMPERATURE	Approx. 5°C (Ambient Temp. 30°C, No Load) at the interior bottom center							
	POWER CORD	2.4m							
	EFFECTIVE CAPACITY	72L							
	OUTSIDE DIMENSIONS	$1800 \text{mm}(W) \times 345 \text{mm}(D) \times 270 \text{mm}(H)$							
	INSIDE DIMENSIONS	1445mm(W) × 288mm(D)[Floor] × 157mm(H)							
	EXTERIOR	Clear Glass, ABS Plastic, PVC Plastic							
	INTERIOR	Clear Glass, ABS Plastic, Stainless Steel							
	DOOR	Sliding Glass \times 4 [368mm(W) \times 172mm(H)]							
	REFRIGERATION SYSTEM	Convection Cooling							
	DEFROST SYSTEM	N/A							
	COMPRESSOR	Hermetic 140W							
	CONDENSER	Fin and Tube type, Cooling Fan Motor provided							
	EVAPORATOR	(Upper) Tube Type, (Lower) Pipe on Sheet Type							
<u>/</u> 5\	REFRIGERANT	R134a/140g							
	ELECTRICAL CIRCUIT PROTECTION	Earth Leakage Circuit Breaker, Earth Wire							
	COMPRESSOR PROTECTION	Motor Protector							
	WEIGHT	Net: 42kg (Gross: 60kg)							
	PACKAGE	Carton (Wooden Pallet) 1880mm(W) × 415mm(D) × 517mm(H)							
	ACCESSORIES	Food Mount x 5, Joint x 2, Drain Hose x 1							
	OPERATING CONDITIONS	Ambient Temperature: 10 - 30°C Voltage Range: Rated Voltage ±6%							
	*We reserve the right to make changes in specifications and design without prior notice.								

- 1. Install the sushi case properly in accordance with the instructions on location, water supply/drain
- connections and electrical connections stated in the instruction manual provided.
 Allow 10mm extra space at the installation site to meet any installation requirements (additional spacing is also required for proper air flow and pipe connections).
- 2. Relative humidity exceeding 60% may result in excessive condensation on the exterior.
- 3. The food temperature is controllable by turning over the food mounts.
- 4. Product Code: S056-C168
- ▲5. Auxiliary Code: C2 and later

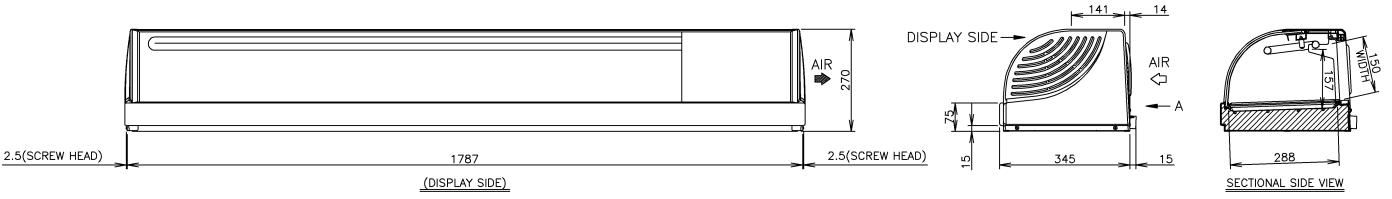

LADDDOVED	Lau	FOLKED	DECIONED	20	ANAZAI	CONT				
approved TORIHAT <i>i</i>		ECKED AEKI	DESIGNED KOIKE		awn HIKOORI	SCALE 1	/10		TRIGON	OMETRY
TORIHATAHIR	osawa	<u></u>	2013.03.2	26	DATE	0.04.40	DRAW	ING NO).	SYMBOL
APPROVED DES	SIGNED	SYMBOL	DATE		2010	7.01.12		706	144	757