


PRODUCT FEATURES


- Individual premium crescent cube.
- Stainless steel evaporator.
- Protected by HoshiGuard Antimicrobial Agent.
- CycleSaver Design.
- EverCheck alert system.
- Durable stainless steel exterior.
- Removable air filters.
- 3 years parts and labour on the entire unit, 5 years (parts only) on compressor and air cooled condenser coil.







TECHNICAL DRAWING

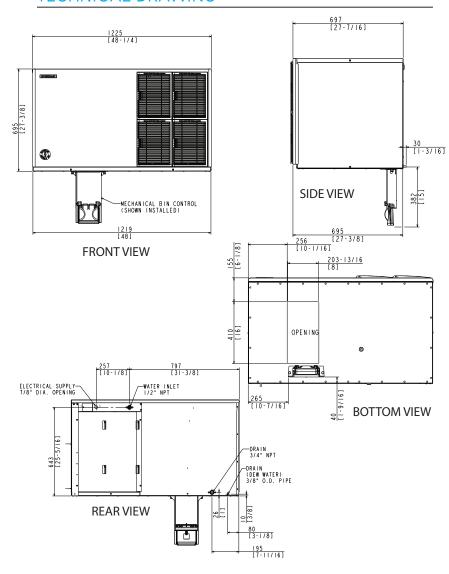

PRODUCT SPECIFICATION

Approx. 624kg @ 21°C Air temp; 10°C Water
Approx. 501kg @32°C Air temp;21°C Water
Shown on optional bin -B 801
Approx. 33-44Min
Approx. 16.3kg/1440pcs
1219mm (W) x 695mm (D) x 695mm (H)
Air
136/154
1 PHASE 220-240V 50Hz
Running: 11.35A
R404A
Ambient Temp.: 7-38°C
Water Supply Temp.: 7-32°C
Water Supply Pressure: 69-779KPa Voltage
Range: 198-254V
Achieved by stacking these units on top of each other. For pricing please contact your Hoshizaki Sales Rep.

