

PH155 & PH155-2

HIGH EFFICIENCY GAS FRYER - 25 LITRE POT

Specifically designed for high capacity, reliability, versatility and efficiency. Frymaster's H55 is a premium open-pot fryer that combines state-of-the-art technology with decades of frying experience and customer satisfaction to set the standard for high-efficiency frying. The H55 gas fryer exceeds ENERGY STAR® standards for efficiency. The H55 fryer saves thousands of dollars annually on energy costs. H55 fryers have long been the trusted choice of chains and independent operators worldwide because their efficient, state-of-the-art heat transfer system, precise controls and durability have stood the test of time.

STANDARD FEATURES

- 25 Litre Capacity
- Open-pot design (split or full) is easy-to-clean
- · High efficiency turbo jet infrared burners
- Stainless steel frypot and door, enamel cabinet
- Electronic ignition from controller
- · Automatic melt cycle and boil-out mode
- Twin baskets
- 152mm legs
- Deep cold zone traps sediment away from the cooking area, safeguarding oil quality and quality of food
- Robust, center-mounted, 1° action solid state thermostat anticipates rate of temperature change
- Cover

OPTIONAL FEATURES

- Computer Magic[®] computer
- Automatic basket lifters
- · Spreader cabinet with flat top or holding station
- FootPrint[®] filter available on single frypot fryers
- FootPrint PRO® filter available on multiple frypot batteries
- Flexible gas hose with quick disconnect and restraining kit

DIMENSIONS

External: 395W x 752D x 1159H mm

Clearance: Sides and rear 152mm, Front 610mm (from combustible walls)

Net Weight: 73kg

TECHNICAL DATA

Gas Type: Natural or Propane

Total Output: 84MJ (PH155), 42MJ per side (PH155-2)

Gas Connection: 1/2" with 3/4" bushing

Power Supply: 230/240V (Cord & Plug provided)

Drain Height: 261mm

PRODUCTION CHIPS FROM FROZEN

35kg per hour

CONTROLLER AS STANDARD

Digital Controller

SHIPPING DATA

Shipping Weight: 92kg

Shipping Dimensions: 559W x 914D x 1181H mm


AGA Approval

AGA 3814 G

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.



PH155-2C shown with optional castors

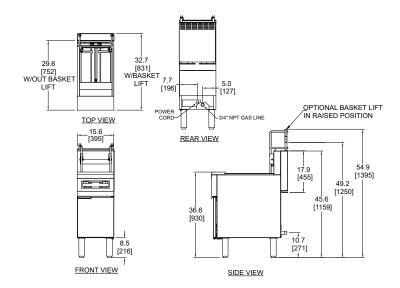



National Head Office 156 Swann Drive

www.comcater.com.au

Derrimut VIC 3030 Tel: +61 3 8369 4600 Fax: +61 3 8369 4699 Melbourne 96-100 Tope Street South Melbourne VIC 3205 Tel: +61 3 8369 4600 Fax: +61 3 8699 1299 Sydney
20/4 Avenue of the Americas
Newington, NSW 2127
Toly 161 2 0748 2000

Tel: +61 2 9748 3000 Fax: +61 2 9648 4762

Brisbane

1/62 Borthwick Avenue Murarrie QLD 4172 Tel: +61 7 3399 3122 Fax: +61 7 3399 5311 Perth Unit 16

Unit 16, 7 Abrams Street Balcatta, WA 6021 Tel: +61 8 6217 0700 Fax: +61 8 6217 0799