



## HHT162E

### Hot holding trolley

#### CONSTRUCTION FEATURES

- Tightness chamber with radiuses corners
- All-around rubber bumpers
- Total thermic insulation with rock or glass wool
- Long lasting front and doors seals made up of food grade of high heat resistance
- Double door to reduce mostly the drop in temperature at opening
- Removable side racks to facilitate cleaning
- Static heating provided by low consumption wire heating element that coils up all the chamber
- Ergonomic and fully built-in door handles with magnetic closure
- Mounted on four 150 mm diameter castors, two of which with brake
- Ergonomic handle for pushing and guiding
- Easy access to facilitate maintenance and repair

#### FUNCTIONAL FEATURES

- Electronic control of the temperature
- Operating temperature 30°-120°C
- Two adjustable humidity vents on the door
- Chamber with safety thermostat

#### STANDARD SUPPLY

- Removable GN 2/1 and GN 1/1 tray racks

#### OPTIONS & ACCESSORIES

- ☐ Pass-through design

**MODULINESRL**

Via dell'Industria 11, Z.I. San Giacomo di Veglia 31029 Vittorio Veneto (TV) - ITALY  
 tel. +39 0438 5063 - fax +39 0438 912 323 - info@moduline.it - www.moduline.it






# moduline

## TECHNICAL INSTALLATION DIAGRAM

Electricity  
supply cable  
inlet



Adjustable vent  
for release  
of excess  
humidity

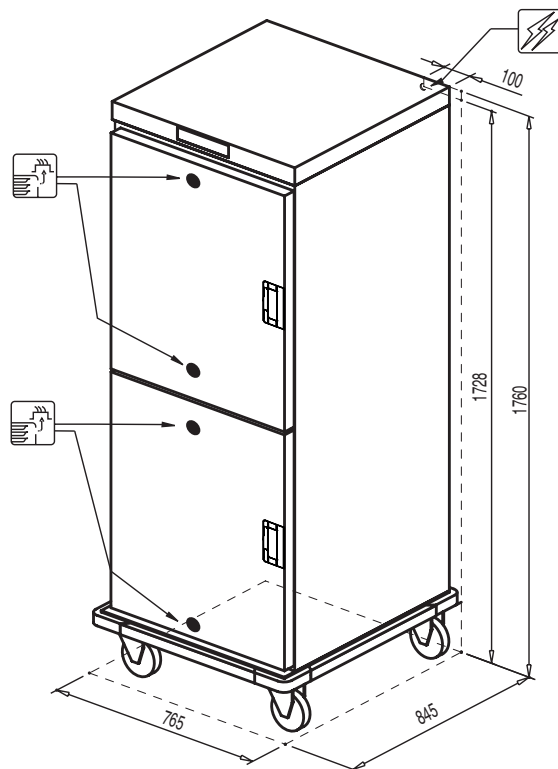

**Overall dimensions  
(W x D x H) - mm**

765 x 845 x 1760

**Trays capacity**

16 x GN 2/1  
32 x GN 1/1

**Tray max. height  
GN 2/1 [mm]**

16 x 65 (h)  
6 x 150 (h)  
4 x 200 (h) + 4 x 65 (h)

**Tray max. height  
GN 1/1 [mm]**


32 x 65 (h)  
12 x 150 (h)  
8 x 200 (h) + 8 x 65 (h)

**Power kW**

3

**Power supply**

AC 230 V / 50 Hz

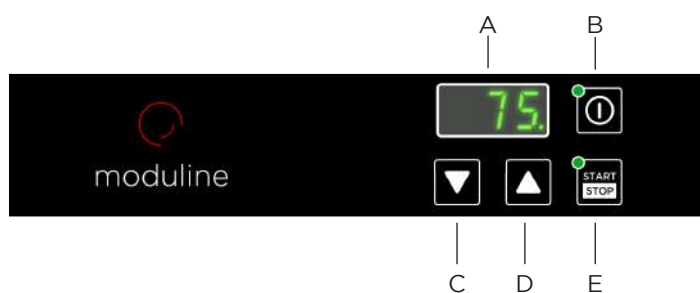

- A Display
- B ON/OFF switch
- C Temperature decrease key
- D Temperature increase key
- E START/STOP key

**MODULINESRL**

Via dell'Industria 11, Z.I. San Giacomo di Veglia 31029 Vittorio Veneto (TV) - ITALY  
tel. +39 0438 5063 - fax +39 0438 912 323 - info@moduline.it - www.moduline.it