

AL

HIGH CAPACITY PASSTHROUGH DISHWASHER

WASHTECH®



STANDARD FEATURES

- 40, 60 and 90 second cycles
 - Wash capacity of up to 1980 plates per hour
 - Compatible with 600x500 racks - 5 GN pans or 22 plates
 - Touchscreen controls with versatile Heads Up Display
 - Powerful 1.5HP soft start wash pump
 - Dual chemical pumps
 - Insulated front hood
 - Assured rinse with dual boilers and booster pump
 - Hands-free drainage system with sump and drain pump
 - Two-stage stainless steel wash and drain filtration
 - Heavy-duty stainless-steel construction and manifold
 - Independent stainless-steel wash and rinse arms
- 1x 600mm GN tray rack (600 70042)
 - 1x 500mm dish rack (600 70028)
 - 1x 500mm cup rack (600 70029)
 - 1x cutlery container (C660503)
 - 1x plumbing connection kit (water and chemical hoses)

SPECIFICATIONS

A - Hot Water

| | |
|---------------------|----------------------------|
| Temperature | 65°C* |
| Connection | 3/4" male, hose supplied |
| Pressure | 100-500kPa |
| Flow | 10L per minute |
| Backflow prevention | Atmospheric vacuum breaker |
| Consumption | 2.4L per cycle |


D - Drainage

| | |
|-----------------------|------|
| Drain pump flexi-hose | 25mm |
|-----------------------|------|

| C - Electrical | V | Hz | A/ph | Max kW |
|----------------|-----|----|------|--------|
| Three phase | 400 | 50 | 15 | 9.00 |

*Suitable for connection to low inlet temp, flow and/or pressure supplies. Isolating switch must be within 1m of, and not directly behind, the machine. Refer to operator manual for installation instructions.

In line with policy to continually develop and improve its products, Washtech reserves the right to change specifications and design without notice.

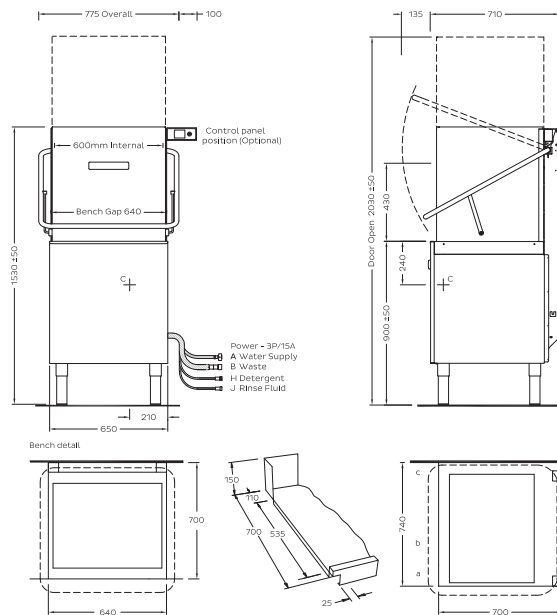

Dimensions

| | |
|-------------|------|
| Width (mm) | 775 |
| Depth (mm) | 710 |
| Height (mm) | 1530 |
| Weight (kg) | 125 |
| Volume (m3) | |

Machine

| | |
|-------------|------|
| Width (mm) | 775 |
| Depth (mm) | 710 |
| Height (mm) | 1530 |
| Weight (kg) | 125 |
| Volume (m3) | |

Packed

| | |
|-------------|------|
| Width (mm) | 760 |
| Depth (mm) | 820 |
| Height (mm) | 1460 |
| Weight (kg) | 146 |
| Volume (m3) | 0.91 |

Water Quality

| | |
|-----|------|
| pH | 7 |
| TDS | 1 |
| Cl- | 100 |
| SO4 | 400 |
| Fe | 0.1 |
| Mn | 0.5 |
| Cu | 0.05 |
| Cl2 | 0.1 |

Min

| | |
|-----|------|
| pH | 7 |
| TDS | 1 |
| Cl- | 100 |
| SO4 | 400 |
| Fe | 0.1 |
| Mn | 0.5 |
| Cu | 0.05 |
| Cl2 | 0.1 |

Max

| | |
|-----|------|
| pH | 8 |
| TDS | 135 |
| Cl- | 100 |
| SO4 | 400 |
| Fe | 0.1 |
| Mn | 0.5 |
| Cu | 0.05 |
| Cl2 | 0.1 |

Corner Installation Notes:

- Machine should be installed so racks are pushed into the back of the machine.
- Allow 300mm clearance to front for service access.
- Splashback return to be no higher than 150mm.

Touchscreen Control:

- Bracket supplied with controls enables install either side, under bench or on wall.
- Consult Operator Manual for full details on correct installation.



moffat.com.au | 1300 269 801



Manufactured in New Zealand by Washtech Limited - Distributed in Australia by Moffat PTY Limited
© Copyright Washtech Limited / Washtech ALC Series-5 / WALC0040 / Feb-25