

XU

UNDERCOUNTER DISHWASHER

WASHTECH®




STANDARD FEATURES

1 and 2 minute dishwashing cycles
 2.2L per cycle water consumption
 Compatible with 500mm racks
 Washes up to 1,080 dishes per hour
 Washtech hybrid controls
 Hands-free auto-drain
 0.5HP wash pump
 Dual chemical pumps
 Drain pump
 Stainless steel wash and drain filter

Includes

1x 500mm dish rack (600 70028)
 1x 500mm cup rack (600 70029)
 1x cutlery container (C660503)
 Quick connection kit (all hoses and 15A plugset)

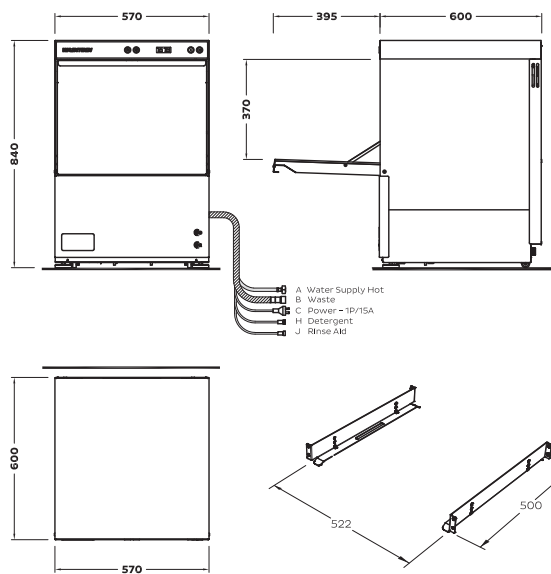

SPECIFICATIONS

A - Hot Water

Temperature	65°C
Connection	3/4" male, hose supplied
Pressure	200-350kPa
Flow	20L per minute
Backflow prevention	Atmospheric vacuum breaker
Consumption	2.2L per cycle*

D - Drainage

Drain pump flexi-hose	25mm
-----------------------	------

C - Electrical

V	Hz	A/ph	Max kW
Single phase	230-240	50	15

Dimensions

Machine	Packed
Width (mm)	605
Depth (mm)	660
Height (mm)	940
Weight (kg)	64
Volume (m3)	0.37

Water Quality

Min	Max
pH	7
TDS	1
Cl-	100
SO4	400
Fe	0.1
Mn	0.5
Cu	0.05
Cl2	0.1

*Water consumption rates may vary based on site conditions
 Isolating switch must be within 1m of, and not directly behind, the machine
 Refer to operator manual for installation instructions

In line with policy to continually develop and improve its products,
 Washtech reserves the right to change specifications and design without
 notice.



moftat.com.au | 1300 269 801

Manufactured in New Zealand by Washtech Limited - Distributed in Australia by Moffat PTY Limited
 © Copyright Washtech Limited / Washtech XU Series-4 / WXU0040 / Apr-24