

ALC

HIGH CAPACITY PASSTHROUGH DISHWASHER
C/W HEAT RECOVERY UNIT



STANDARD FEATURES

Integrated Heat Recovery Unit - no canopy required*
Recycles energy from steam to heat incoming water
Compatible with 600x500 racks - GN pans or 22 plates
50, 70 and 100 second cycles - up to 1584 plates per hour
Touchscreen controls with versatile installation options
Powerful 1.5HP soft start wash pump
Dual chemical pumps
Insulated front hood
Assured rinse with dual boilers and booster pump
Hands-free drainage system with sump and drain pump
Two-stage stainless steel wash and drain filtration
Heavy-duty stainless-steel construction and manifold
Independent stainless-steel wash and rinse arms

1x 600mm GN tray rack (600 70042)
1x 500mm dish rack (600 70028)
1x 500mm cup rack (600 70029)
1x cutlery container (C660503)
1x plumbing connection kit (water and chemical hoses)

SPECIFICATIONS

D - Cold Water

Temperature	<25°C
Connection	3/4" male, hose supplied
Pressure	100-500kPa
Flow	10L per minute
Backflow prevention	Atmospheric vacuum breaker
Consumption	2.4L per cycle

D - Drainage


Drain pump flexi-hose	25mm
-----------------------	------

C - Electrical	V	Hz	A/ph	Max kW
Three phase	400	50	15	12.30

*Subject to adequate general ventilation. Full details and certification from SEED available on request.
Isolating switch must be within 1m of, and not directly behind, the machine.
Refer to operator manual for installation instructions.

In line with policy to continually develop and improve its products, Washtech reserves the right to change specifications and design without notice.

WASHTECH®

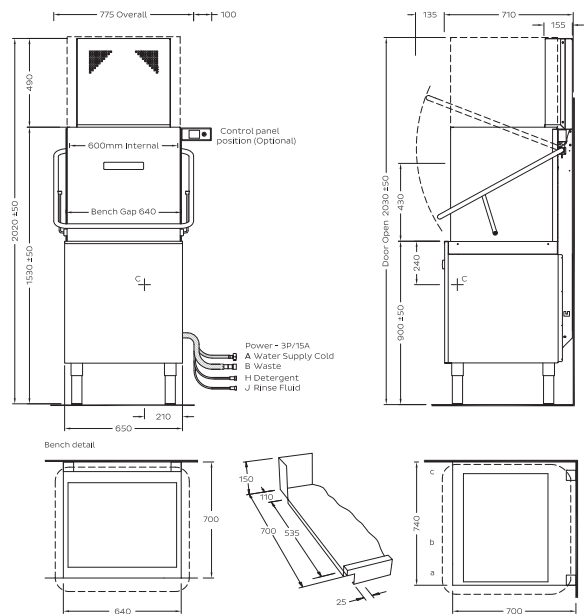

Dimensions

	Machine	Packed
Width (mm)	775	800
Depth (mm)	710	950
Height (mm)	2025	2020
Weight (kg)	176	193
Volume (m3)		1.54

Water Quality

	Min	Max
pH	7	8
TDS	1	135
Cl-		100
SO4		400
Fe		0.1
Mn		0.5
Cu		0.05
Cl2		0.1

Corner Installation Notes:

- Machine should be installed so racks are pushed into the back of the machine.
- Allow 300mm clearance to front for service access.
- Splashback return to be no higher than 150mm.

Touchscreen Control:

- Bracket supplied with controls enables install either side, under bench or on wall.
- Consult Operator Manual for full details on correct installation.



moffat.com.au | 1300 269 801



Manufactured in New Zealand by Washtech Limited - Distributed in Australia by Moffat PTY Limited
© Copyright Washtech Limited / Washtech ALC Series-5 / WALC0040 / Feb-25